


[Document type] Drawing


[Figure 1]

(1/19)

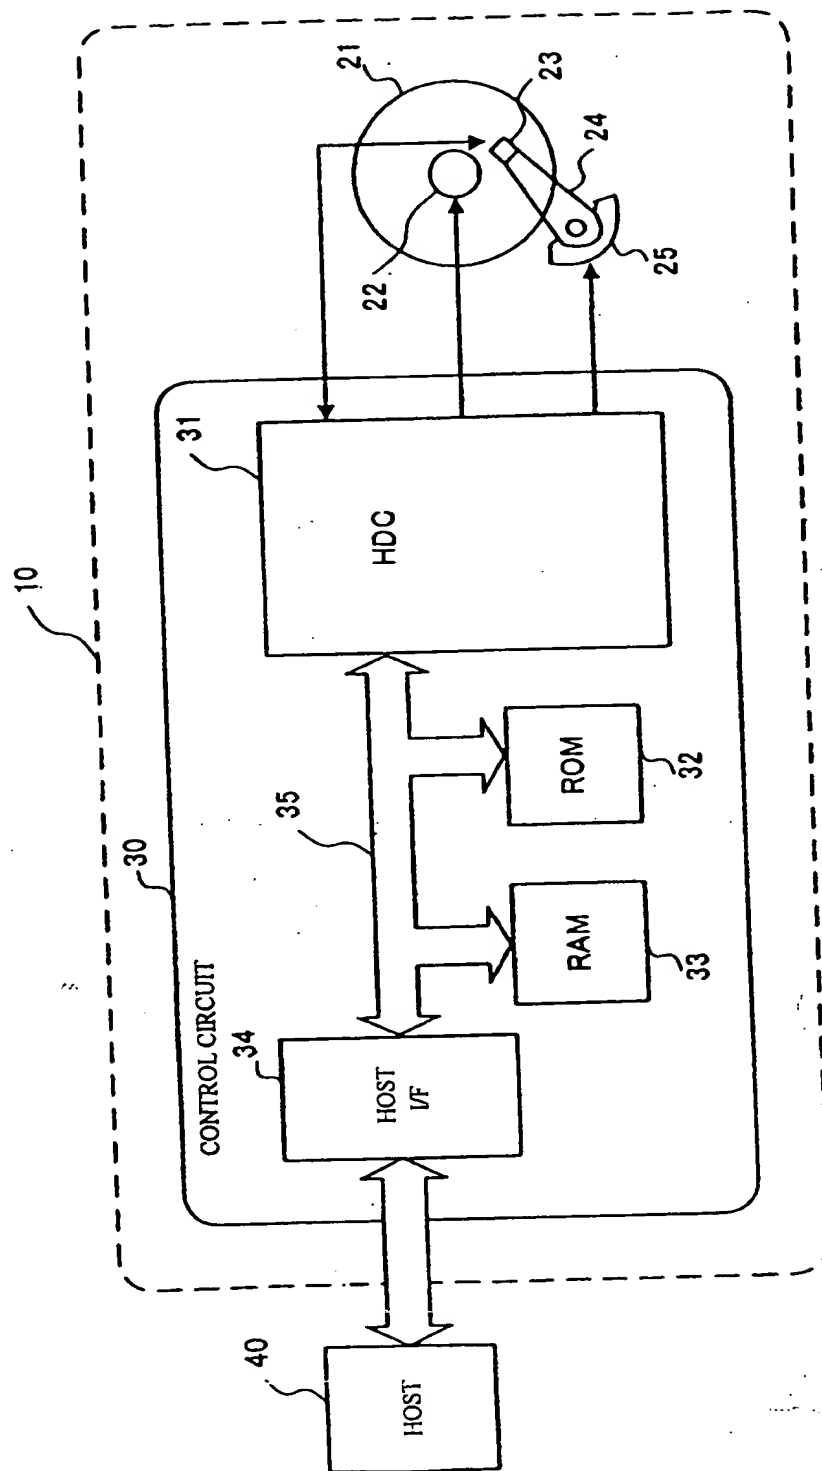


[Figure 2]

(2/19)

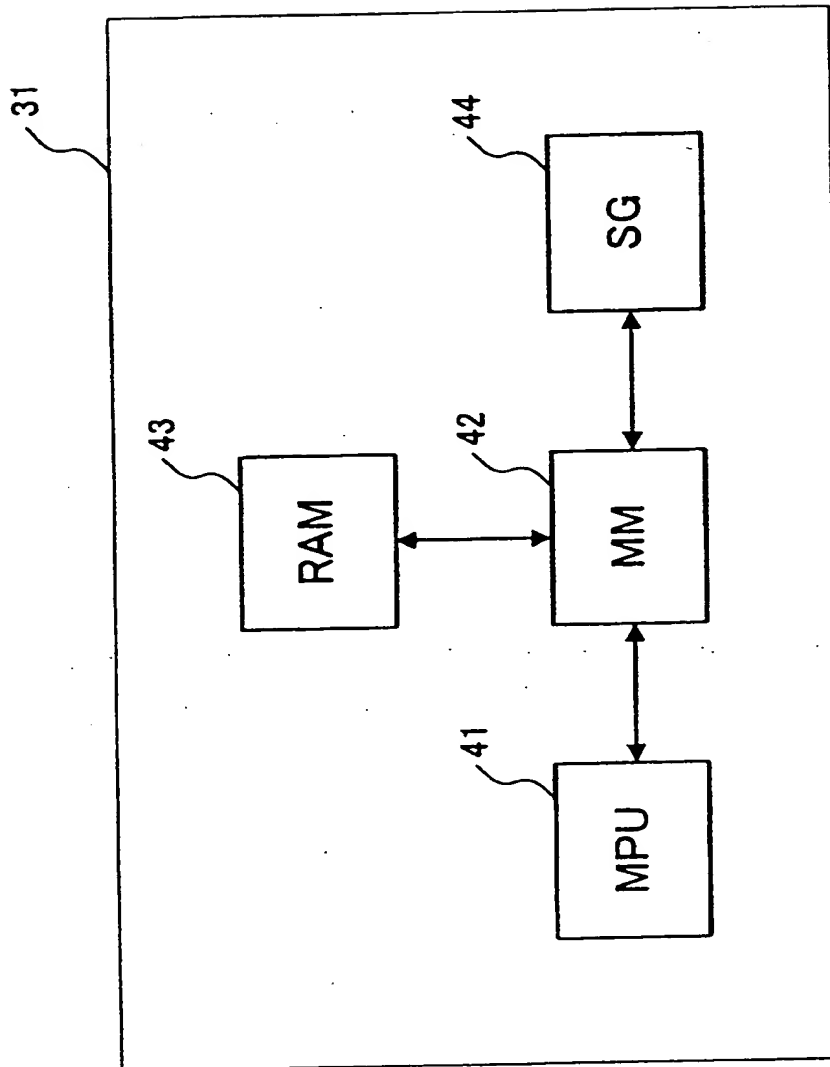


[Figure 3]

(3/19)

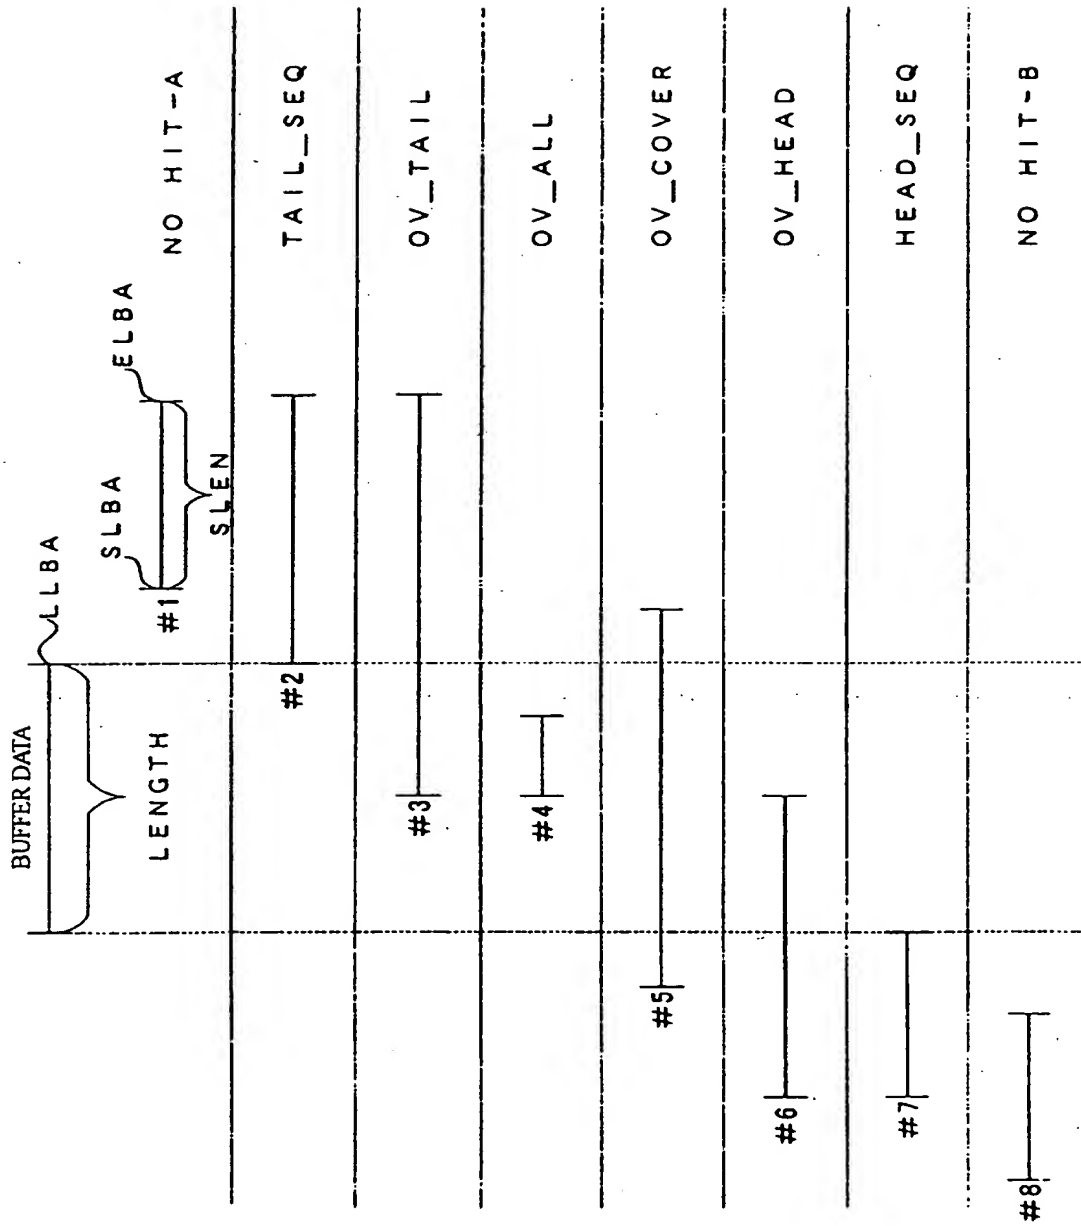


[Figure 4]

(4/19)

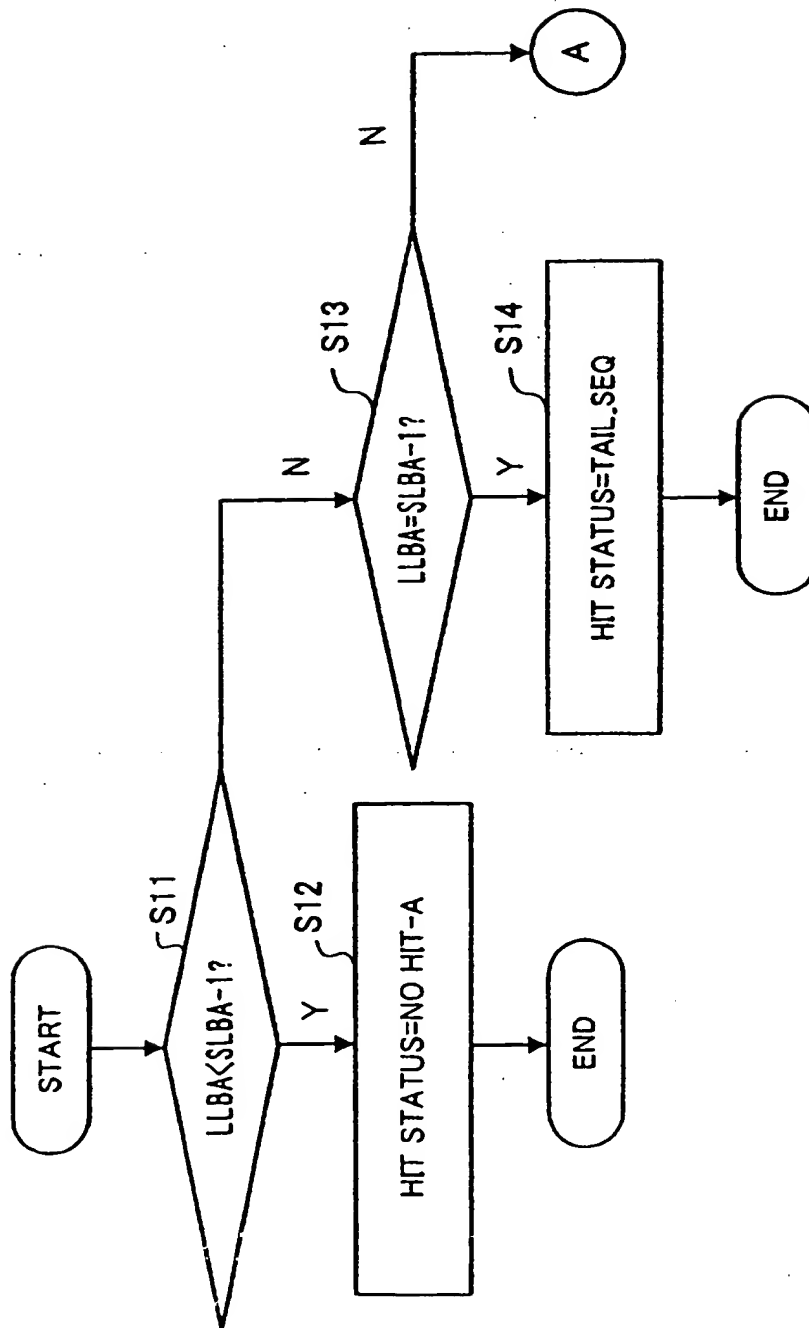


[Figure 5]

(5/19)

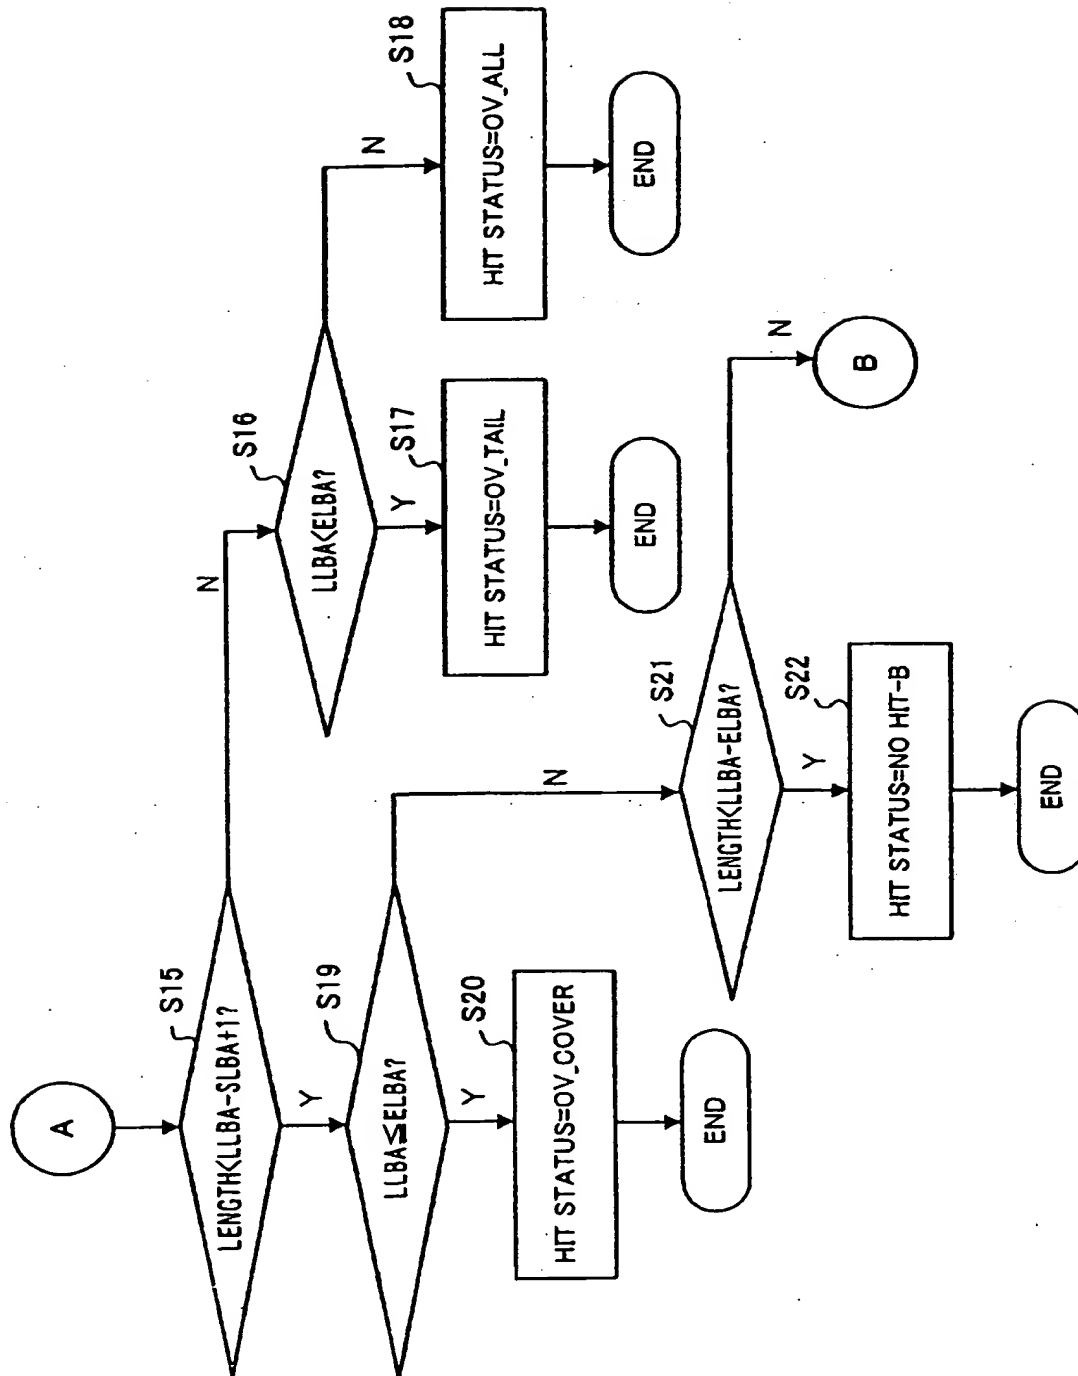


[Figure 6]

(6/19)

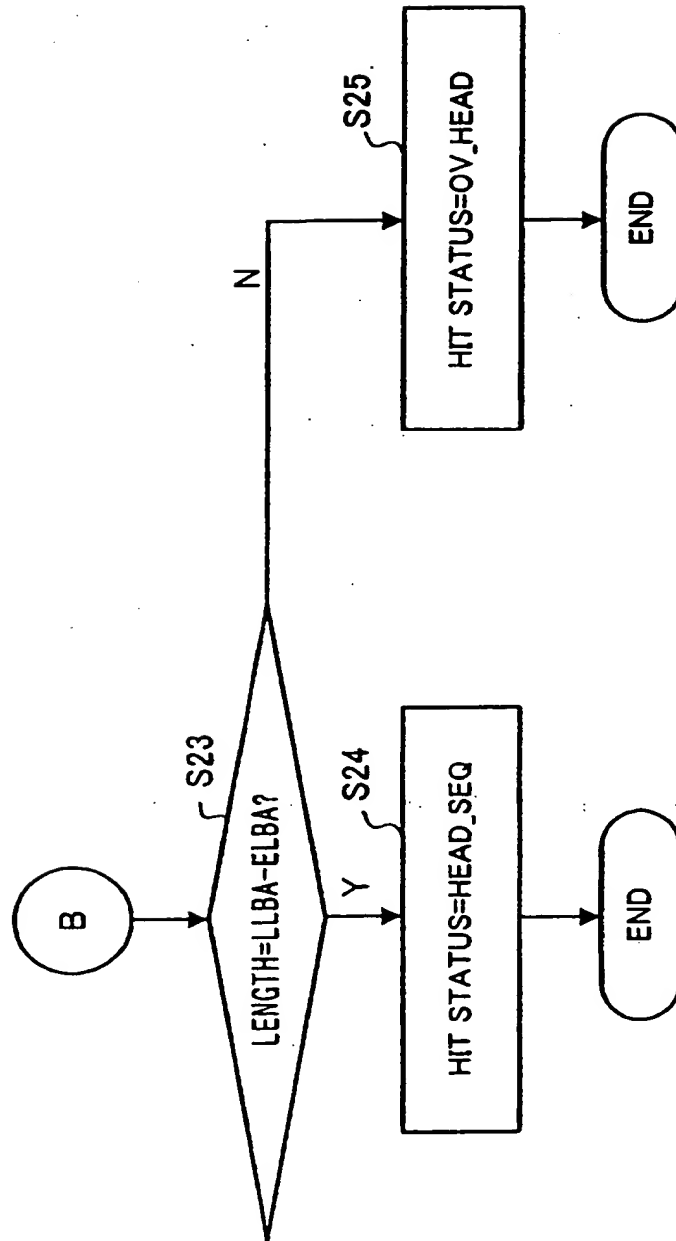


[Figure 7]

(7/19)

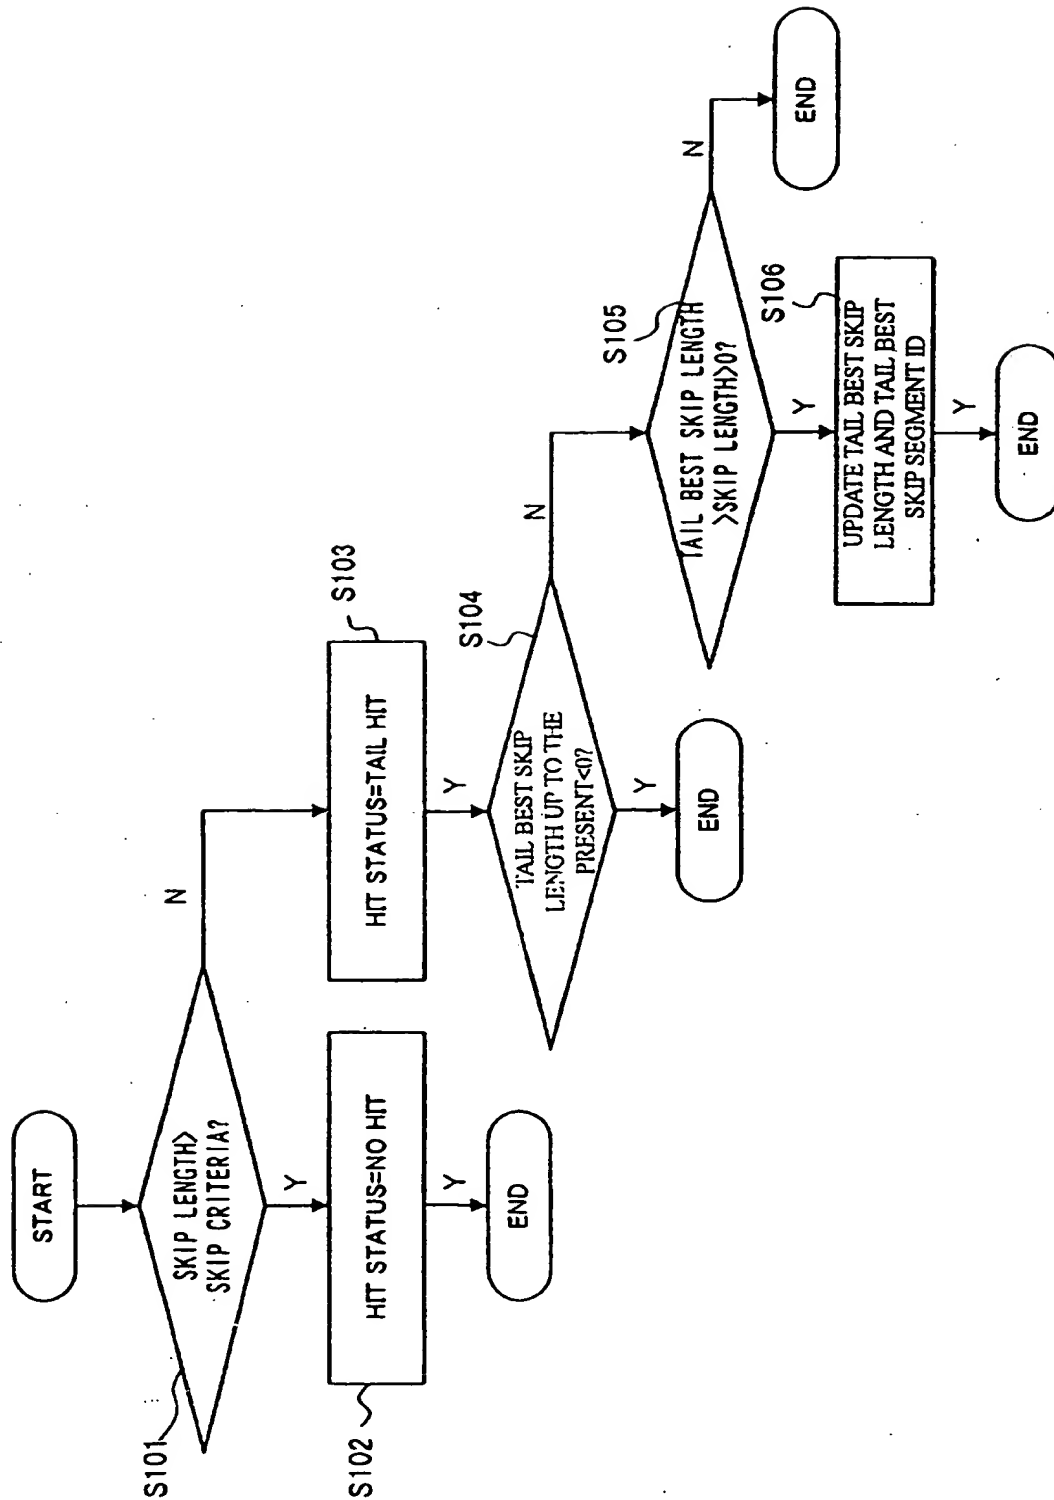

[Figure 8]


(8/19)

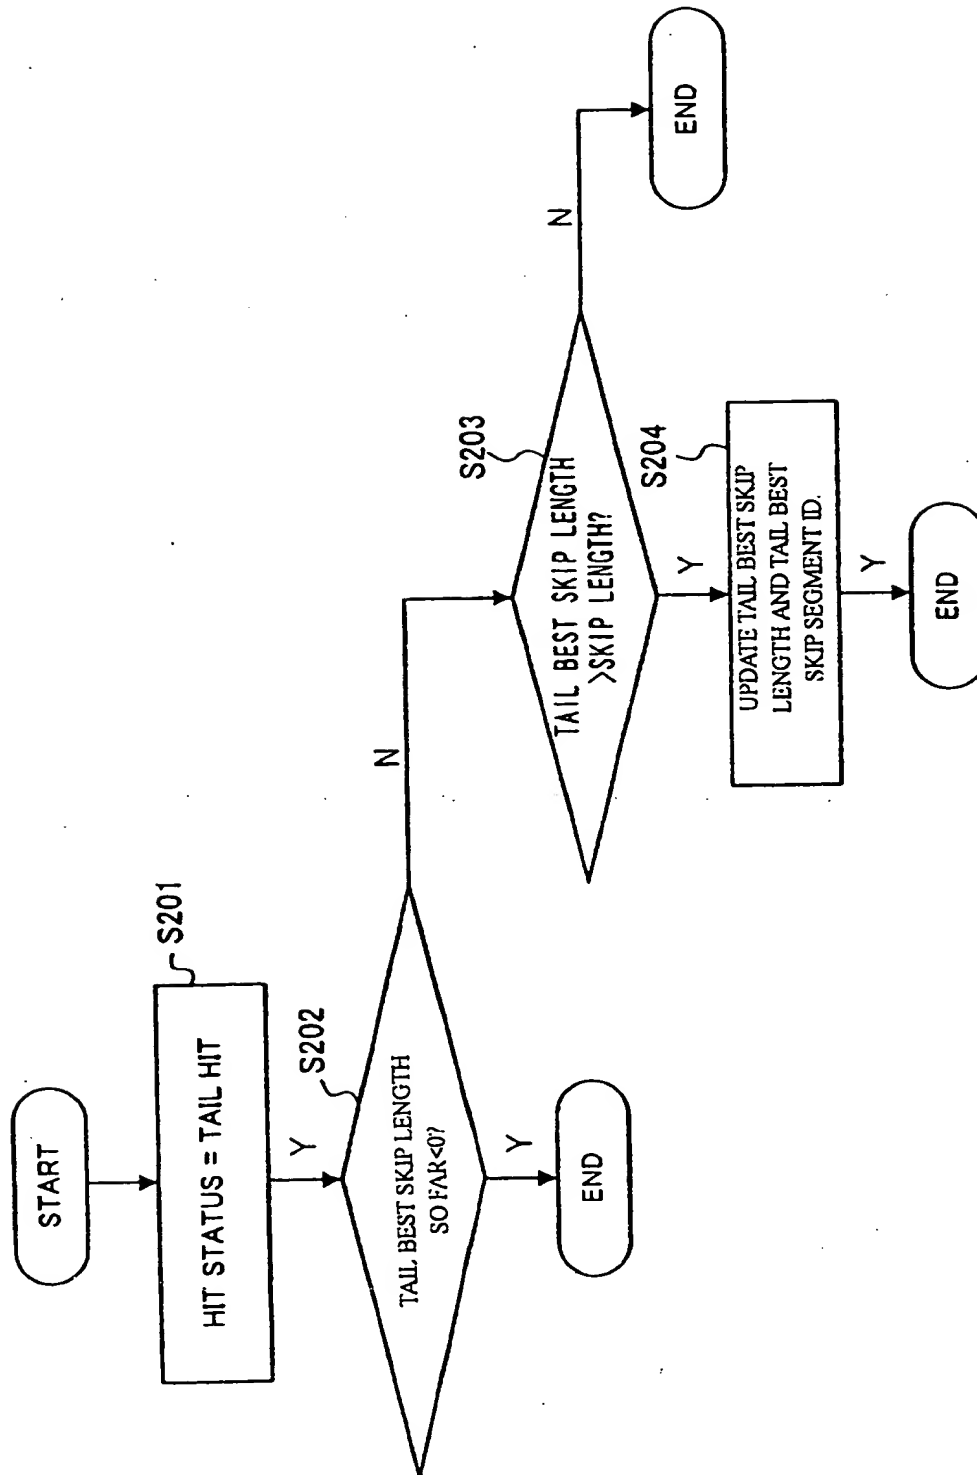



[Figure 9]


(9/19)

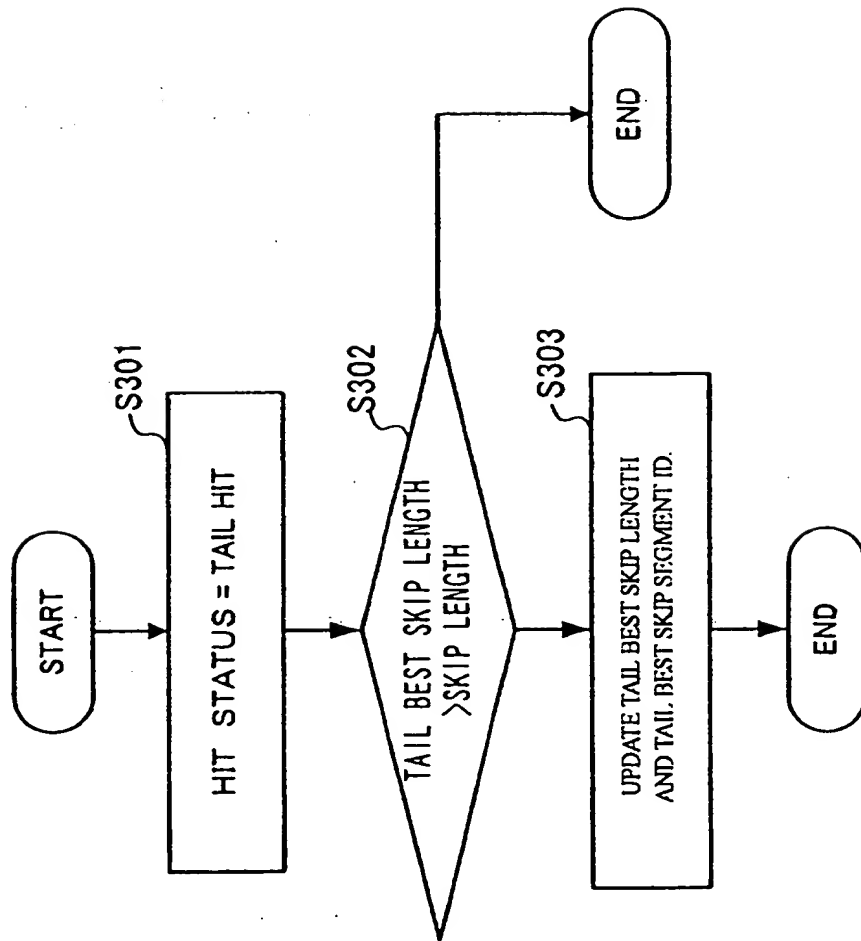

T00240" 4668E360


[Figure 10]

(10/19)

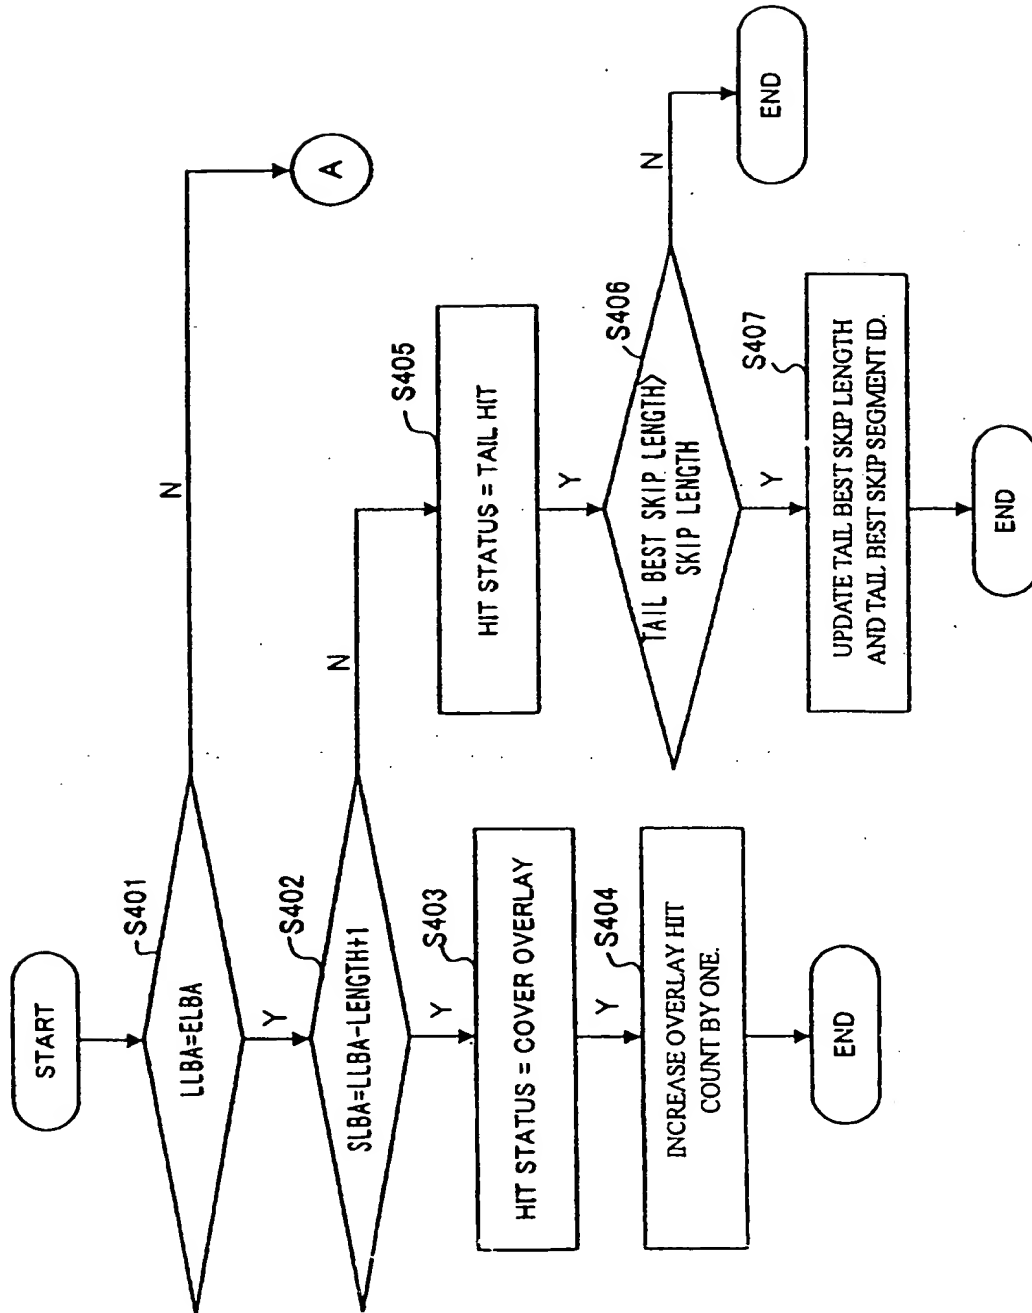


[Figure 11]

(11/19)

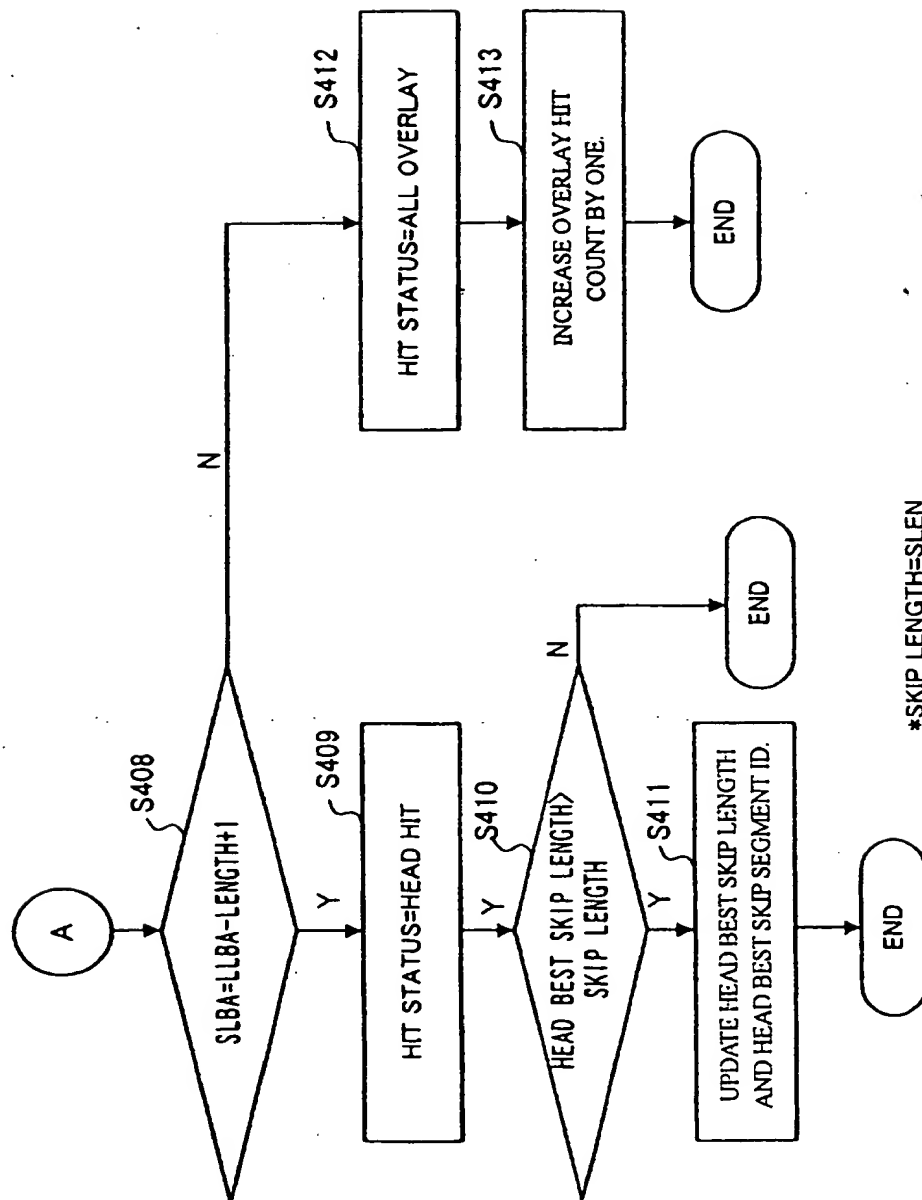


[Figure 12]

(12/19)

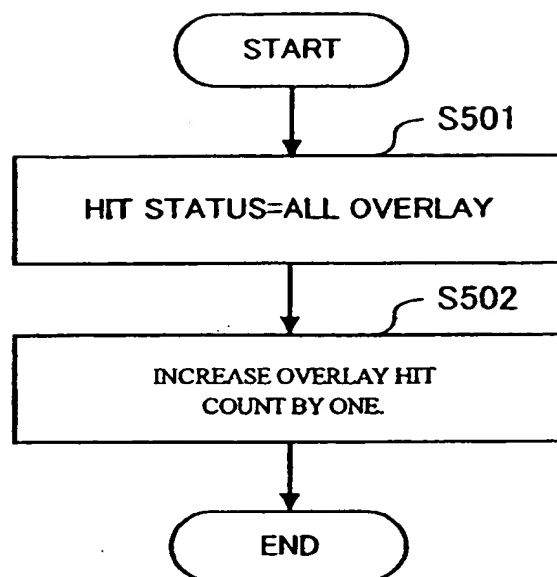


[Figure 13]

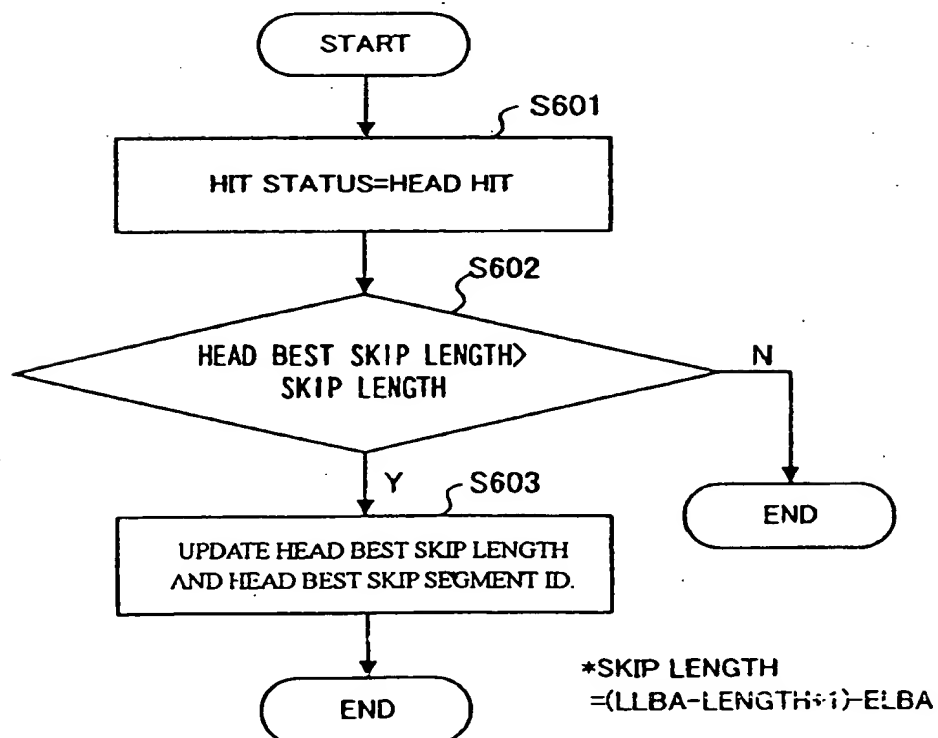

[Figure 14]

(13/19)

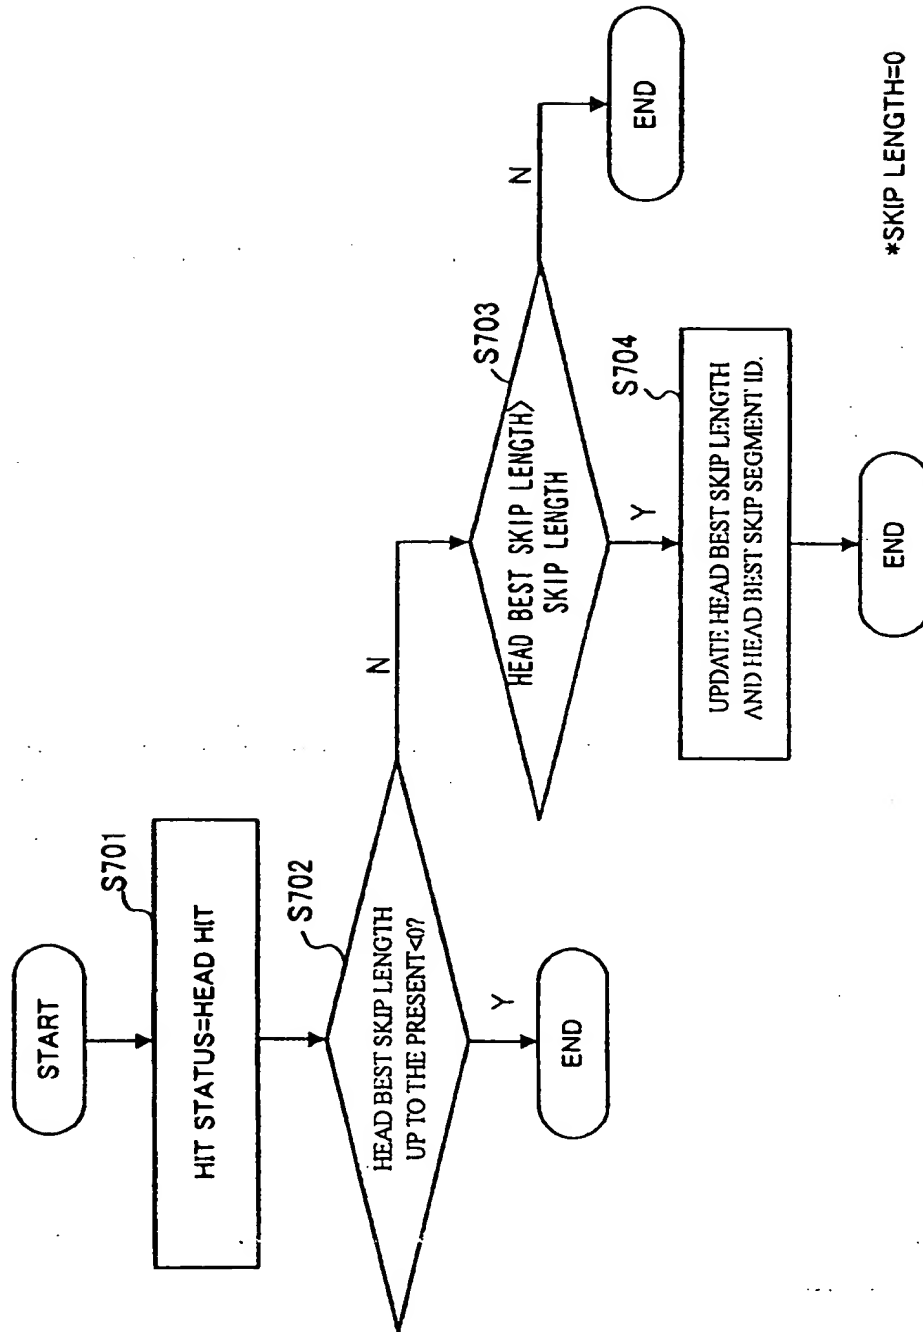


400240" 46682360

39-2000-0113

[Figure 15]

(14/19)

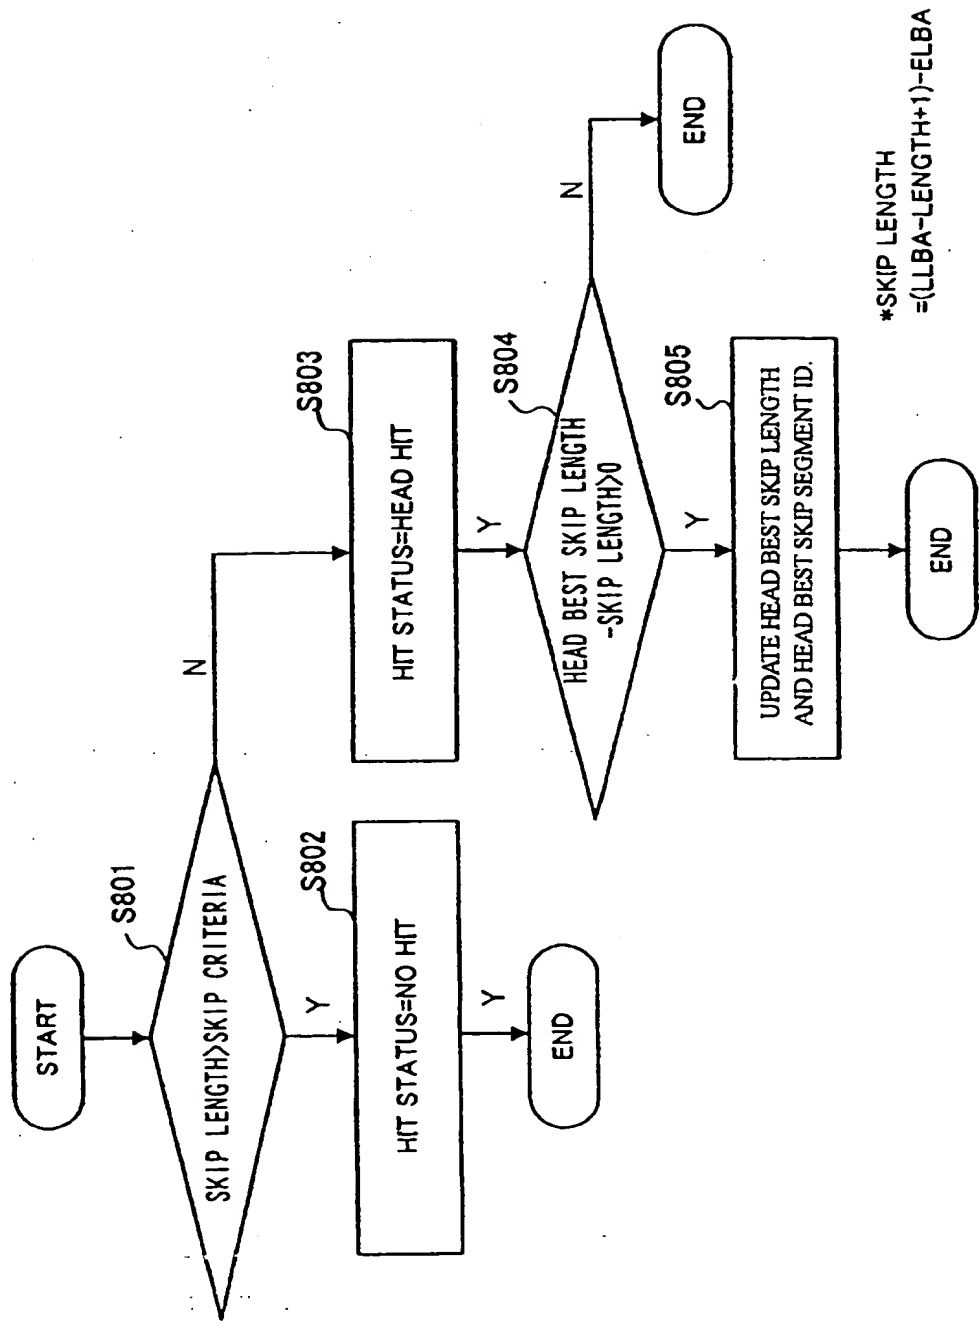

[Figure 16]

(15/19)


H/W USE	H/W USE	H/W USE	NO OF HIT
HEAD BEST SKIP LENGTH	HEAD BEST SKIP SEGMENT ID	TAIL BEST SKIP LENGTH	TAIL BEST SKIP SEGMENT ID

[Figure 17]


LAST LBA LOW	LAST LBA HIGH	LENGTH	HIT STATUS
--------------	---------------	--------	------------

[Figure 18]

(a)

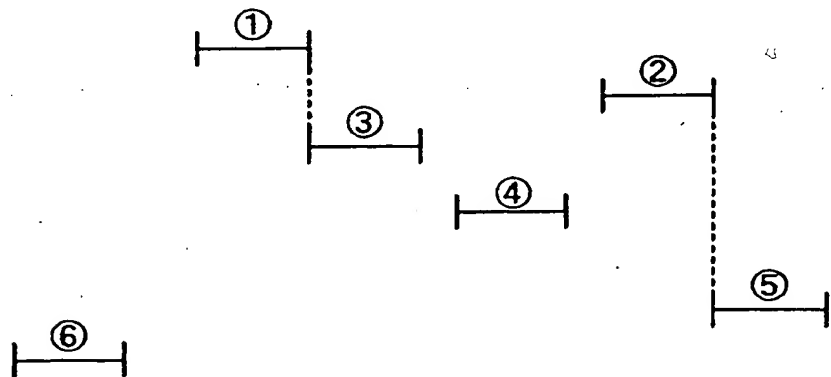


(b)

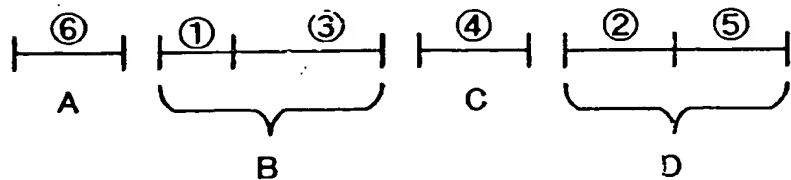


[Figure 19]

(16/19)

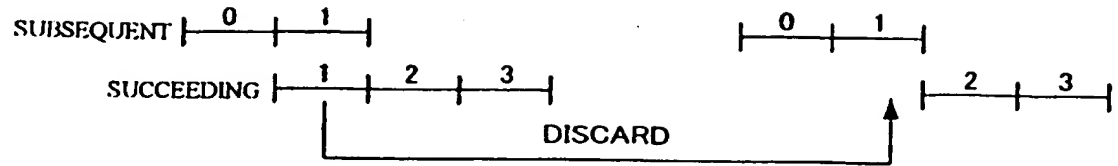


[Figure 20]

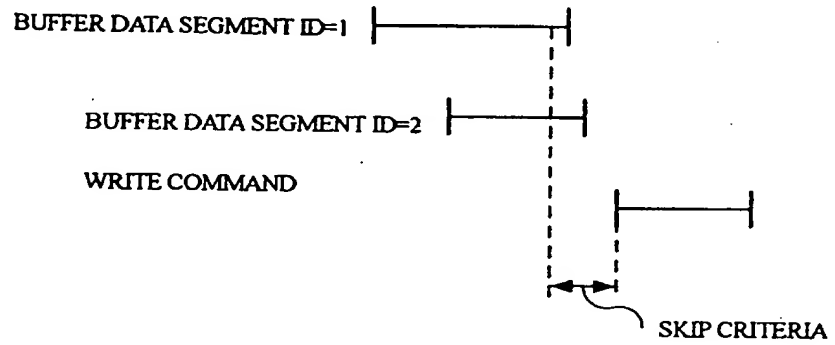

1603240 4653250




(17/19)

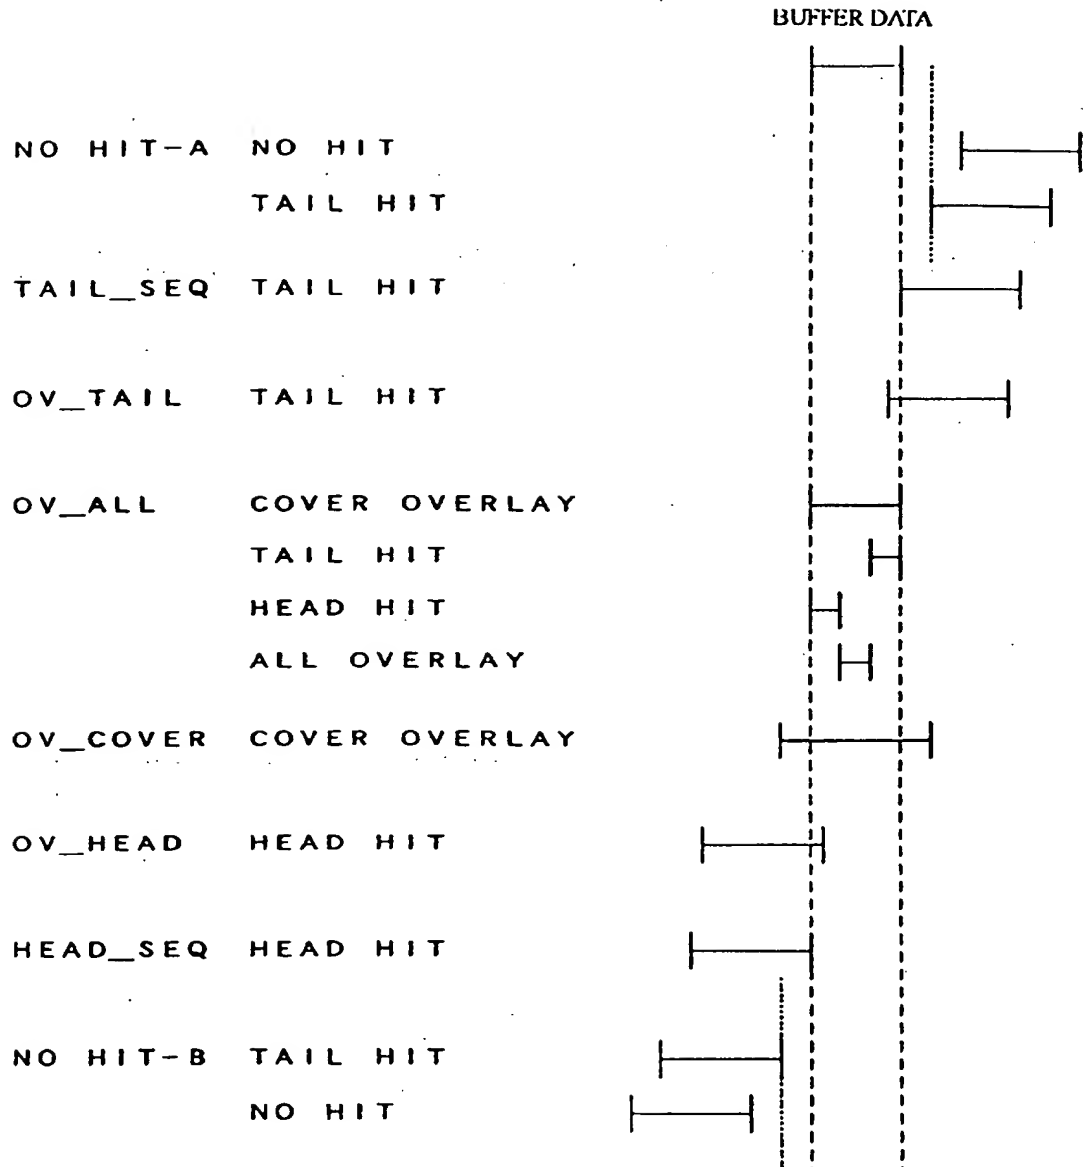


[Figure 22]

(18/19)

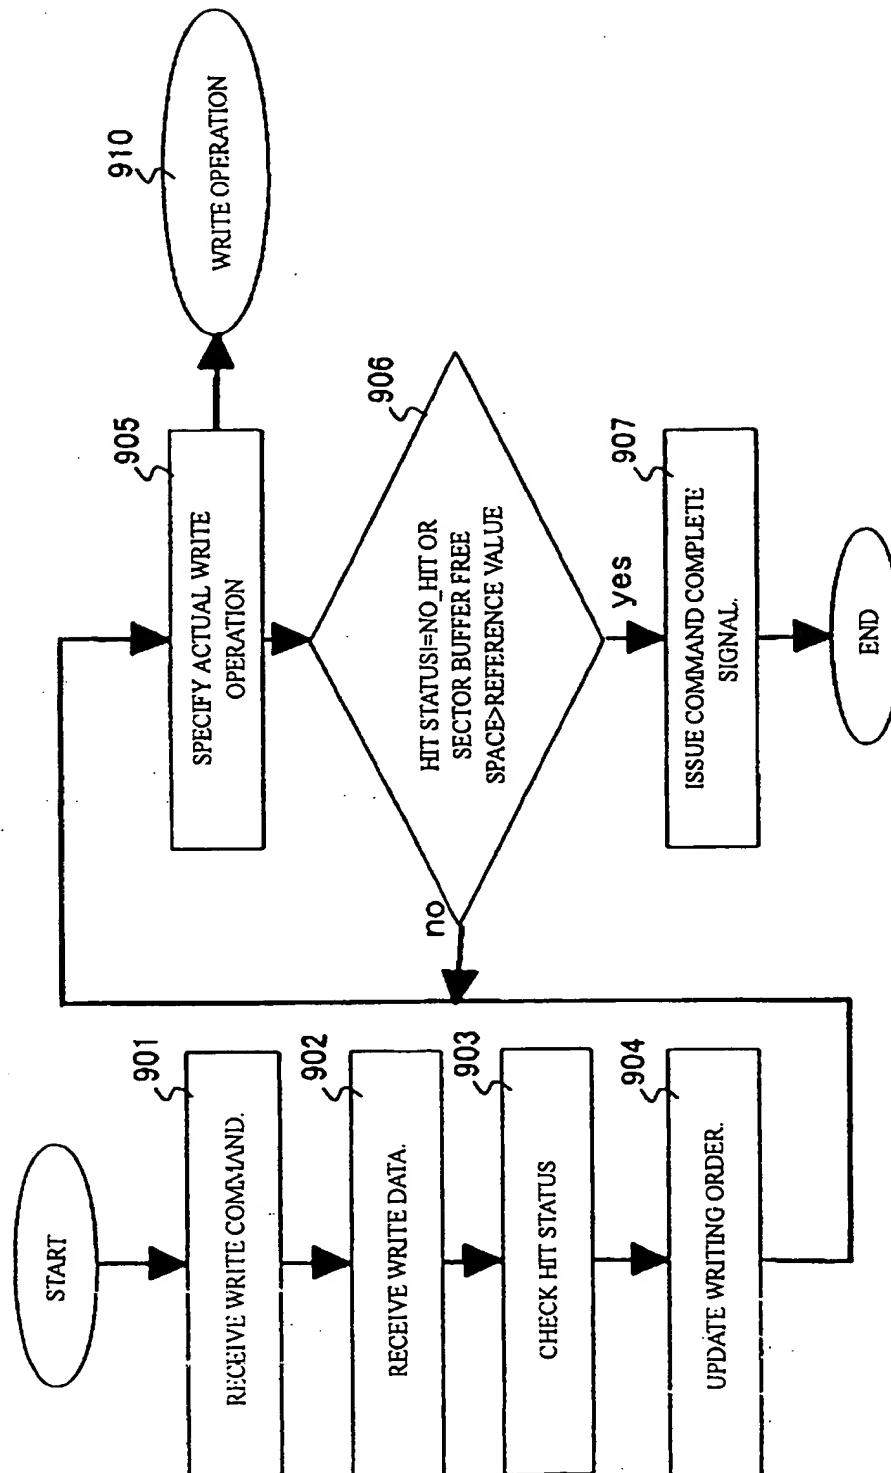

[Figure 23]

(19/19)

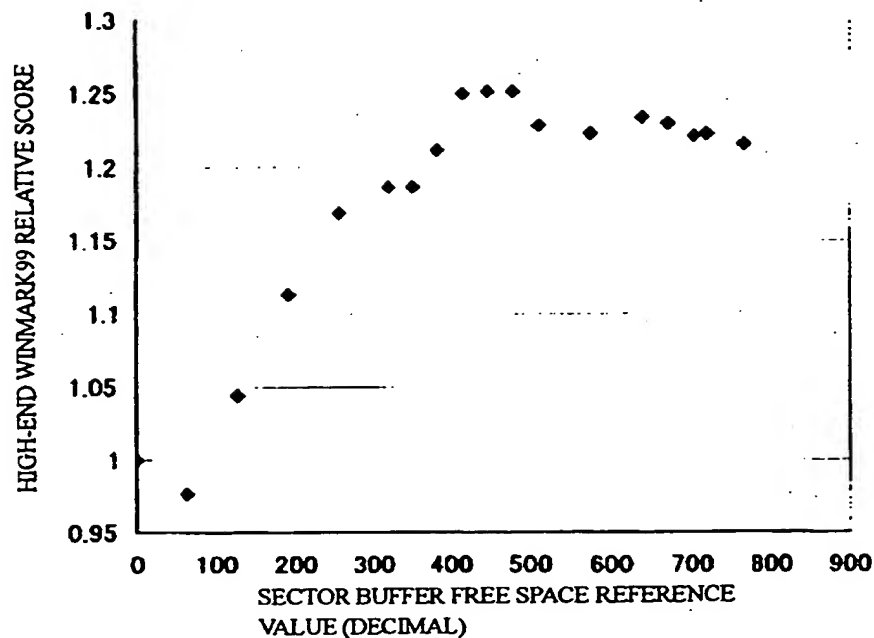

[Figure 24]

